User Manual

EA-119A



To mount your flat panel monitor or any parts at an ergonomically correct position, start at step 1 and continue as directed.

Part Check-List

1		X1	4	(5mm)	X1
2		X2	5	(4mm)	X1
3		X2	6	(2mm)	X1
			7		X4
			8		X1

Step 1

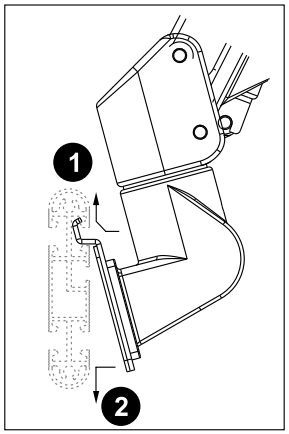

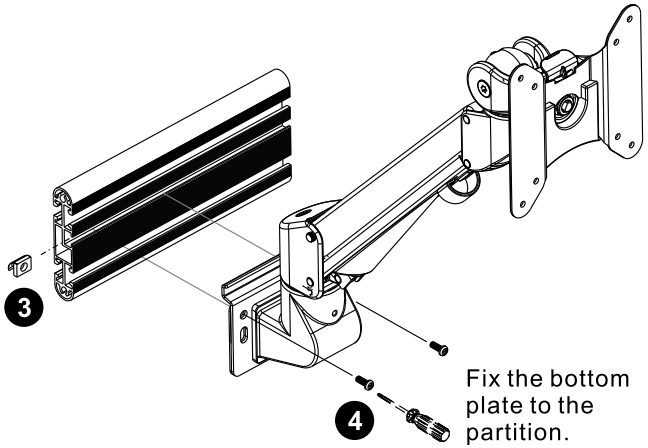

Assembly Guide

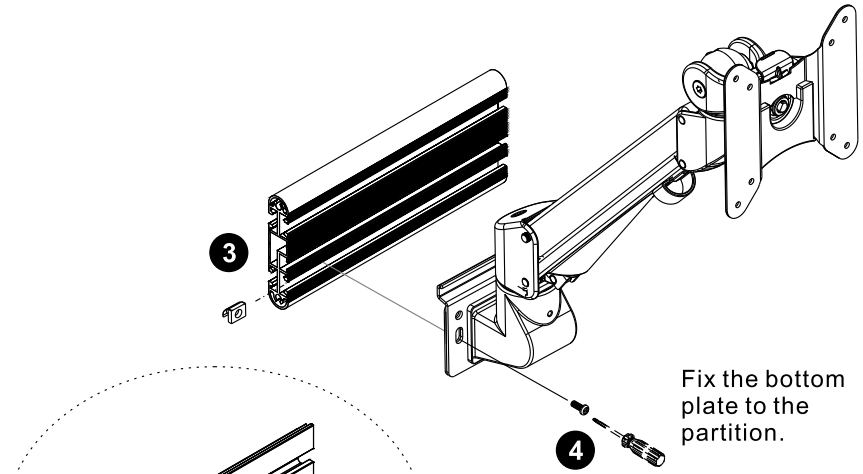

Step 2

Remove the VESA plate by pinching the grey plastic tab to release the lock, then pull the plate upward to separate from the arm.

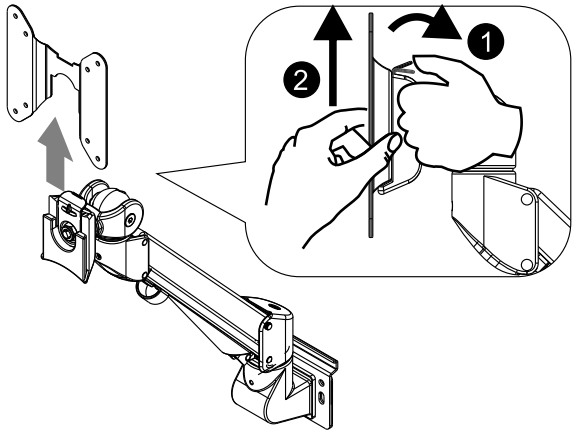

Assembly Guide

Step 3

Place LCD monitor face down on a flat surface. Align the VESA plate holes with the holes on the back of the monitor and attach using the screws provided (shown below).

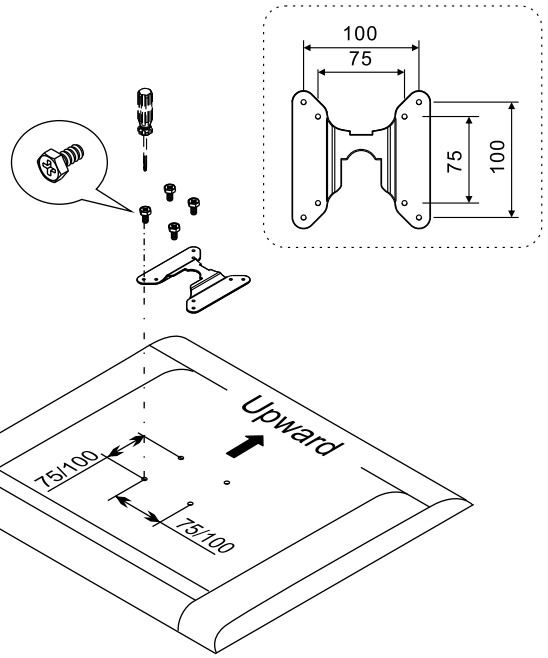

Step 4

Slide the monitor (with VESA plate) onto the arm making sure it "clicks" securely into place.

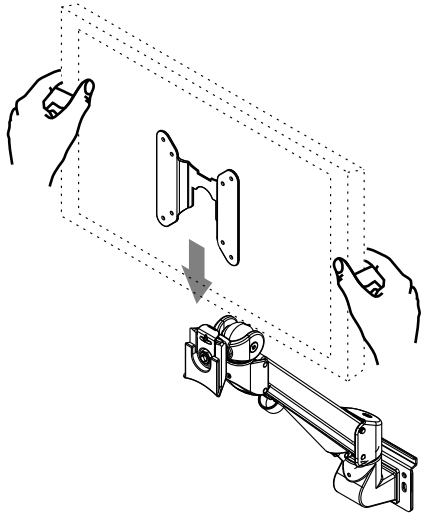

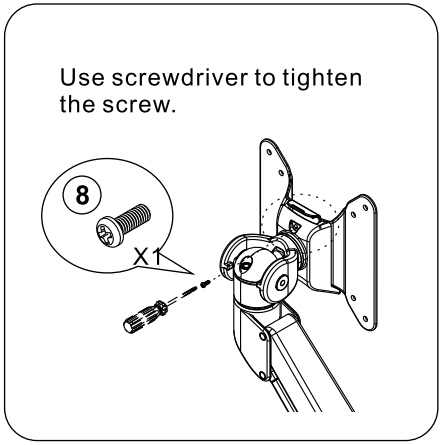

Assembly Guide

Step 5

Slide the cable cover upward to allow room for cables to be placed inside. Route cables under arm then slide the cover back on.

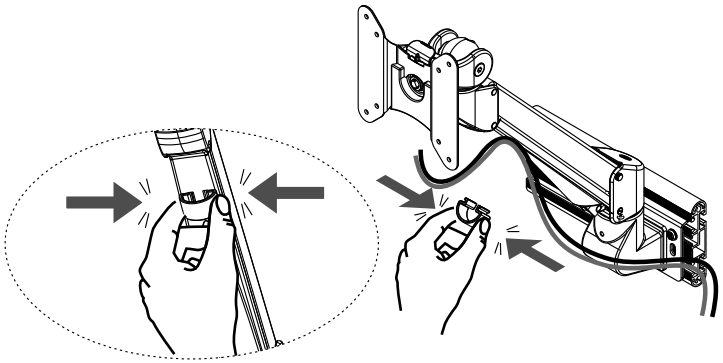

Tension Adjustment

Caution:
Support arm while adjusting tension.

Adjustment:
Use the Allen key provided to adjust the tension to correspond to the weight of the monitor. Twist the Allen key in a clockwise direction for lighter monitors; counterclockwise for heavier monitors.

Weight Capacity:
6.6 ~ 17.6 lbs (3~8kg)

- Products loading capacities are based on monitors' center of gravity less than 3cm from the end of the VESA interface.
- Loading capacity could be reduced if monitor size of greater than 26 inches or depth of greater than 5.5cm.
- All products specifications in catalogues are subject to change without notice.

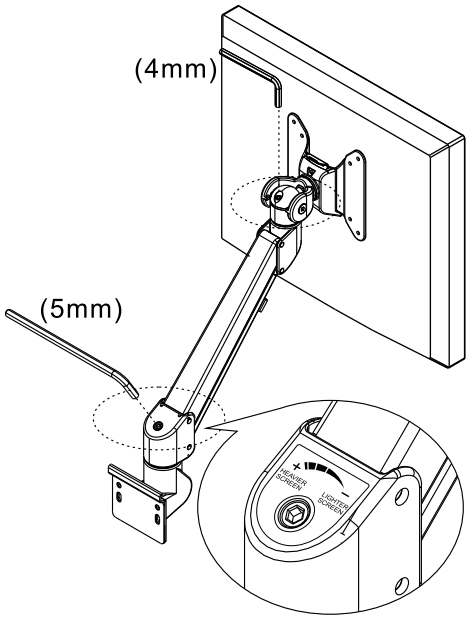

Please contact your supplier for more information.